



GENERAL INFORMATION

The 2311FA Pressure Tester field tests aircraft pressure systems for both reciprocating and turbine engine pressure systems. It provides pressure for testing pressure transmitters, warning switches pressure-type torque (BMEP) indicators and system leak testing in the range of 0-600 PSI.

The unit consists of a cylinder equipped with a manually operated screw piston for developing pressure. A fluid reservoir is connected through a control valve to the pressure cylinder. 1/8 NPT female outlet port is provided for attachment to the unit or system to be tested. The tester is portable and rugged, with a wide range capability. It is simple to operate, self-contained and both line and shop proven.

Two types of gauges are recommended and available depending upon the requirements of the user (standard or inspector test types). Standard gauges are available with an accuracy of $\pm 2\%$ of full scale in ranges of 0-60, 0-200, and 0-600 pounds per square inch (PSI). Inspector test gauges are available with an accuracy of $\pm \frac{1}{2}\%$ of full scale in ranges of 0-60, 0-100, 0-160, 0-200, 0-300 and 0-600 PSI.


The use of VITON (Fluro-carbon) seals on the piston permits the use of any fuel, lubricating or hydraulic fluid. The principal NON-COMPATIBLE fluids NOT to be used with VITON seals are: alcohol's, aldehydes, amines, alkyl phosphate esters (skydrol), ethers and ketones.

Standard and Inspector gauges available

Select optional gauges from the following:
(priced separately)

Standard gauge accuracy $\pm 2\%$ of full scale
 0-60 PSI, order P/N 304-00003
 0-200 PSI, order P/N 304-00004
 0-600 PSI, order P/N 304-00005

Inspector gauge accuracy $\pm \frac{1}{2}\%$ of full scale
 0-60 PSI, order P/N 304-00100
 0-100 PSI, order P/N 304-00101
 0-160 PSI, order P/N 304-00102
 0-200 PSI, order P/N 304-00109
 0-300 PSI, order P/N 304-00103
 0-600 PSI, order P/N 304-00104

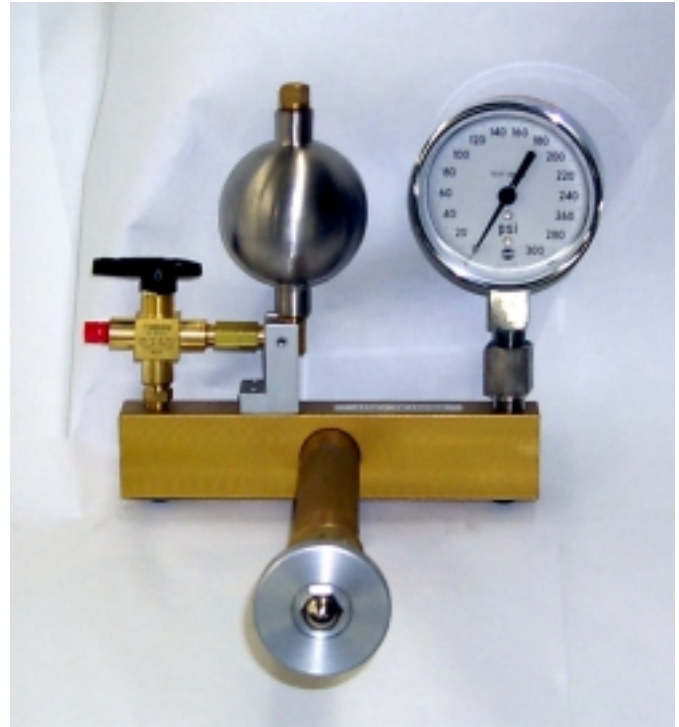

FEATURES

- Manufactured with lightweight aluminum.
- Field tests aircraft pressure systems in the 0-600 PSI range
- Provides for both leak and calibration tests
- Pressure source for pressure transducers, warning switches, and direct reading pressure gauges
- Applicable for shop or line use
- No electrical or pneumatic source needed

DIMENSIONS

	In.	cm.
Height	6.6	16.8
Width	9.3	23.6
Depth	8.3	21.0
	lbs.	kg
Weight	2.42	1.1

(Excluding Gauge)



Aero Express, Inc. is an Authorized Distributor of Barfield
www.aeroexpress.com 816-246-4500 sales@aeroexpress.com