

Avionics

IFR 6000 Ramp Test Set



The IFR 6000 is a compact, lightweight and weatherproof unit designed for testing transponder modes A/C/S, TCAS I and II as well as DME.

- One main user screen for each test mode
- Detachable antenna
- Large display
- Simple user interface
- Lightweight and compact <8 lbs. (3.6 kg)
- Battery 6 hours plus duration
- Fully FAR part 43 appendix F compliant
- European Elementary and Enhanced Surveillance

The IFR 6000 features an extremely easy to use interface where every parameter the user commonly needs to view is displayed on screen.

Controls

Dedicated Mode keys for XPDR, DME and TCAS allow quick selection of the operational mode.

The application dependant softkeys and data select/slew keys provide an intuitive man machine interface.

DME mode is provided with dedicated keys for frequency/channel selection and RF level control. For frequently varied parameters in DME and TCAS modes, such as Range and Rate, dedicated keys are provided.



Operational Modes

Each operational mode has one main user screen. The operational modes are:

XPDR (Sub-Modes: ADS-B MON, ADS-B GEN & GICB)

DME

TCAS 1, 2 (Sub-Modes: TIS)

Most tests can be completed without leaving the main user screens. This simplifies the line technician's testing task.

XPDR-AUTO TEST **PASS** BAT 2.5 Hr

CONFIG:GENERIC MODE S LEVEL=4
ANTENNA: BOTTOM

REPLIES =A,C,S FREQ =1090.12 MHZ
TOP ERP =57.1 dBm MTL =-74.0 dBm
BOT ERP =56.0 dBm MTL =-73.1 dBm

A CODE =1234 C ALT =35000 ft
S CODE =1234 S ALT =35000 ft
TAIL =N12345 DF17 DETECTED=NO
FLT ID =AA-50 AA=AC3421(53032041)
FS=5-NO ALERT SPI IN AIR
VS=IN AIR COUNTRY=United States

RUN TEST TEST LIST CONFIG SELECT ANT

XPDR - CONFIG BAT 2.5 Hr

- 1 GENERIC ATCRBS
- 2 ATCRBS CLASS A
- 3 ATCRBS CLASS B
- 4 GENERIC MODE S
- 5 MODE S CLASS A**
- 6 MODE S CLASS B
- 7 MODE S CL B OPT FREQ
- 8 MODE S CL B OPT PWR

INFO RETURN

Mode S and ATCRBS Transponder

Xpdr Auto-Test:

Every parameter the user commonly needs to view is displayed on one screen.

The auto-test performs all tests defined by FAR Part 43 Appendix F, including the proposed Eurocontrol additional tests.

The tests are tailored automatically according to reported transponder level to avoid erroneous failures.

XPDR - TEST LIST BAT 2.5 Hr

- 1 A/C DECDR/SLS - PASS
- 2 A/C F1/F2 SPACE/WIDTH - PASS
- 3 POWER/FREQ - PASS
- 4 S ALL-CALL - PASS
- 5 S REPLY TIMING - PASS**
- 6 S REPLY - PASS
- 7 UF0 - PASS
- 8 UF4 - PASS
- 9 UF5 - PASS
- 10 UF11 - PASS
- 11 UF16 - PASS
- 12 UF20 - PASS

SELECT TEST RETURN

The test list is selected from the auto-test screen. This provides an easy means of selecting any of the individual tests that comprise the auto-test.

Tests on the 2nd screen (not shown) include:

13 UF21

14 UF24

15 ELEMENTARY SURVEILLANCE 1

16 ELEMENTARY SURVEILLANCE 2

15 ENHANCED SURVEILLANCE

XPDR-A/C SPAC/WIDTH **FAIL** BAT 2.5 Hr

F1WIDTH A= 0.300 us C= 0.450 us
F2WIDTH A= 0.400 us C= 0.600 us
F1-F2 A=20.300 us C=20.300 us

REPLY DELAY A=3.05 us C=3.55 us
REPLY JITTER A=0.250 us C=0.000 us
REPLY RATIO A=PASS C=PASS

ATCRBS ALL-CALL A=PASS C=PASS

PULSE AMP VAR A=0.0 dB C=0.0 dB

RUN TEST PREV TEST NEXT TEST RETURN

Individual tests may be reviewed for failures which are identified by an arrow symbol.

User selects config required for test.

If the class of the transponder is unknown, the generic config may be selected which applies to the widest limits.

The test set will automatically determine the Mode S transponder level.

The selected config parameters may be displayed by pressing the INFO softkey.

Eight predetermined configs are provided to meet the currently fielded transponder test needs.

XPDR-ELEMENT SURV2 **PASS** BAT 2.5 Hr

BDS=1,7 :0,5 :0,6 :0,7 :0,8 :0,9
:0,A :2,0 :2,1 :4,0 :4,1 :4,2 :4,3
:4,4 :4,5 :4,8 :5,0 :5,1 :5,2 :5,3
:5,4 :5,5 :5,6 :5,7 :5,8 :5,9 :6,0

BDS 1,8=0000000000000000
BDS 1,9=0000000000000000
BDS 1,A=0000000000000000
BDS 1,B=0000000000000000
BDS 1,C=0000000000000000
BDS=2,0 FLIGHT ID=UA661
BDS=3,0 ARA=1110101000000000 RAC=1010
RAT=0

RUN TEST PREV TEST NEXT TEST RETURN

XPDR - ELEMENT SURV1 **PASS** BAT 2.5 Hr

BDS=1,0 SUBNETWORK VER =1
ENH PROT IND =LVL 2-4
SPEC SERV CAP =YES
UELM CAPABILITY =16/1 s
DELM CAPABILITY =16/500 ms
AIRCRAFT ID CAP =YES
SURV IDENT CAP =YES
COMM USE GICB REP=1
DTE =YES
CONT FLAG =YES
SQUITTER CAP =YES

RUN TEST PREV TEST NEXT TEST RETURN

The Eurocontrol Elementary Surveillance DAP's (Downlink Aircraft Parameters) are displayed on two screens

XPDR-ENHANCED SURV **PASS** BAT 2.5 Hr

DF=20
BDS4,0 MCP/FCU SEL ALT =65520 ft
BDS5,0 ROLL ANGLE = 40.1 deg
TRUE TRACK ANGLE= 90.3 deg
GROUND SPEED = 512 kts
TRACK ANGLE RATE= 4.00 deg/s
TRUE AIR SPEED = 512 kts
BDS6,0 MAGNETIC HEADING= 180.3 deg
IND AIR SPEED = 512 kts
MACH NO = 0.300
INERT VERT VEL =-1400 ft/min
BARO ALT RATE =-1400 ft/min

RUN TEST PREV TEST NEXT TEST RETURN

Eurocontrol Enhanced Surveillance DAP's are displayed on one screen.

```

XPDR - UFO          PASS          BAT 2.5 Hr

DF = 0
VS = 0 - IN AIR
CC = 0 - NOT SUPPORTED
SL = 0 - NO TCAS SENS LEVEL REPORTED
RI = 12 - AIRSPEED 301 TO 600 KNOTS

AC = 03A0(01640) 10700 FT
MODE C ALT COMPARE = PASS
AA = AC3421(53032041)
DF11 ADDRESS COMPARE = PASS

RUN TEST  PREV TEST  NEXT TEST  RETURN

```

No more HEX data field interpretation!

All Mode S Format tests display parameter in engineering units.

```

XPDR-UF11          PASS          BAT 2.5 Hr

DF=11
CA=0-LEVEL 2 CA MODE
PI=02F08D
AA=AC3421(53032041)

II MATCH=PASS
SI LOCKOUT TIMER=16S
SI MATCH=PASS

RUN TEST  PREV TEST  NEXT TEST  RETURN

```

Comprehensive II / SI code and lockout timer test

```

XPDR-S ALL-CALL    PASS          BAT 2.5 Hr

ITM REPLY
DELAY      A=128.08 us  C=128.07 us
JITTER     A=0.510 us  C=0.510 us
RATIO      A=PASS      C=PASS
ADDRESS    A=2AC421    C=2AC421

MODE S ALL-CALL= PASS
ADDRESS    = 2AC421
TAIL= N12345
COUNTRY= United States

RUN TEST  PREV TEST  NEXT TEST  RETURN

```

```

DME                BAT 2.5 Hr

VOR: 100.00 MHz    RF LVL: -100 dBm
FREQ: 978 MHz      RATE: 650 kts    IN
CHAN: 17X          RANGE: 450.00 nm

% REPLY: 100      ECHO :OFF
SQTR : ON         IDENT: OFF

TX FREQ = 1041.00 MHz    ERP=55.0 dBm
P1 WIDTH= 3.500 us      PRF=150 Hz
P2 WIDTH= 3.500 us
P1-P2 = 36.00 us(Y)

RUN TEST  PREV PARAM  NEXT PARAM  STOP RATE  IN/OUT

```

DME

All the user needs are on one screen.

- RF level control for track sensitivity tests
- Supports all DME/TACAN channels selectable in VOR paired channels
- Full UUT measured parameters are displayed.

```

TCAS                BAT 2.5 Hr

SCENARIO: 0-CUSTOM
TCAS TYPE:TCAS II          %REPLY: 100
INTRUDER TYPE:MODE S
RANGE START: 10.00 nm      STOP: 0.00 nm
RANGE RATE : 350 kts
ALT START: +1000 ft        STOP: 0 ft
ALT RATE : 600 fpm         CONVERGE :OFF
UUT ALT : 31200 ft         ALT DETECT: ON
FREQ= 1030.00 MHz         ERP= 57.0 dBm
RANGE= 21.00 nm IN        ALT= +1000 ft ↓
TCAS STATUS= TRACKING
STATUS= NON-THREAT        ENCOUNTER= 0:00

RUN TEST  PREV PARAM  NEXT PARAM  MON  STORE/RECALL

```

TCAS

TCAS types...


TCAS 1 MODE C

TCAS 2 ATCRBS

TCAS 2 MODE S

The Auto-Altitude feature interrogates Mode S XPDR of A/C under test to obtain current altitude.

Select pre-stored named scenarios directly from the auto-test screen.

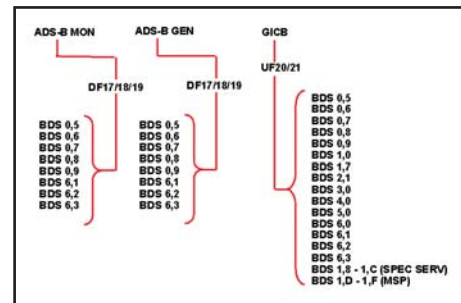

ADS-B and GICB

ADS-B MON: Used to monitor DF17 extended squitter from transponders and DF18 extended squitter from 1090 MHz ADS-B emitters.

ADS-B GEN: Used to generate DF17/DF18 extended squitter, simulating transponders and 1090 MHz ADS-B emitters.

GICB: Used to monitor DAP's (all fields).

```

ADS-B MON DF17      BAT 2.5 Hr

1 0.5 AIRBORNE POS    - AVAIL
2 0.6 SURFACE POS     - NOT CAP
3 0.8 IDENT & CAT      - AVAIL
4 0.9 AIRBORNE VEL    - AVAIL
5 6.1 A/C STATUS      - AVAIL
6 6.2 TARG STATE      - AVAIL
7 6.3 A/C OP STATUS   - NO SQTR

RUN TEST  BDS DATA  RETURN

```

ADS-B MON:

The ADS-B MON LIST shows BDS formats supported.

The BDS status is annunciated to indicate if the squitter has been captured, not available or not seen.

The BDS DATA key displays the BDS DATA screen for the selected BDS number.

```

ADS-B MON BDS 0,5      AVAIL    BAT 2.5 Hr

BDS=0,5 AIRBORNE POS      TYPE=14
DF17 AA=3AC421 (16542041)  COUNT=1000
ME=0000000000000000    PERIOD=DEFAULT
LAT= 37 39 00 N          LONG= 97 25 48 W
POS=GLOBAL SAF=1        T=N/UTC
SURVEILLANCE STATUS      = NO INFO
BARO PRES ALT=131025 ft

[ RUN ] [ ] [ PREV ] [ NEXT ] [ RETURN ]
TEST   TEST   TEST   TEST

```

ADS-B MON:

The BDS DATA screen displays full content of selected BDS format being received via DF17 or DF18 extended squitters.

```

ADS-B GEN DF17          BAT 2.5 Hr

1 0,5 AIRBORNE POS      - ENABLED
2 0,6 SURFACE PO        - DISABLED
3 0,8 IDENT & CAT        - DISABLED
4 0,9 AIRBORNE VEL       - ENABLED
5 6,1 A/C STATUS        - DISABLED
6 6,2 TARGET STATE      - ENABLED
7 6,3 A/C OP STATUS     - DISABLED

[ RUN ] [ BDS ] [ ] [ BDS ] [ RETURN ]
TEST   DATA          DISABLE

```

The BDS ENABLE/DISABLE key enables or disables the selected BDS number for squittering via DF17 or DF18 extended squitters. The BDS DATA key displays the BDS DATA screen for the selected BDS number.

```

ADS-B GEN BDS 0,5      BAT 2.5 Hr

BDS:0,5 AIRBORNE POS      TYPE:14
DF17 AA:3AC421 (16542041)
ME:0000000000000000    PERIOD: DEFAULT
LAT:37 39 00 N          LONG: 97 25 48 W
POS:GLOBAL SAF:1        T:N/UTC
SURVEILLANCE STATUS      :NO INFO
BARO PRES ALT: 32,000 ft

[ RUN ] [ PREV ] [ NEXT ] [ BDS ] [ RETURN ]
TEST   PARAM   PARAM   DISABLE

```

ADS-B GEN:

BDS DATA screens display full content of the selected BDS format in RTCA/ICAO engineering units.

The NEXT & PREV PARAM keys select data fields for editing via the data slew keys.

```

GICB DF20              BAT 2.5 Hr

1 0,5 AIRBORNE POS      - AVAIL
2 0,6 SURFACE POS       - NOT CAP
3 0,7 SQTR STATUS       - AVAIL
4 0,8 IDENT & CAT        - AVAIL
5 0,9 AIRBORNE VEL       - AVAIL
6 1,0 DATA LNK CAP     - AVAIL
7 1,7 COM GICB CAP      - AVAIL
8 1,8 SPEC SERV CAP #1  - AVAIL
9 1,9 SPEC SERV CAP #2  - AVAIL
10 1,A SPEC SERV CAP #3 - AVAIL
11 1,B SPEC SERV CAP #4 - AVAIL
12 1,C SPEC SERV CAP #5 - AVAIL

[ RUN ] [ BDS ] [ RETURN ]
TEST   DATA

```

GICB:

The BDS LIST shows BDS formats supported.

The BDS DATA key displays the BDS DATA screen for the selected BDS number.

```

GICB BDS 3,0          AVAIL    BAT 2.5 Hr

BDS=3,0 ACAS ARA
DF20 AA=3AC421 (16542041)
MB=0000000000000000
TIDB= 70 deg
TIDA= 32000 ft          TIDR= 1.00 nm
ARA=111010100000000    TID=3A4518
RAC=1010 RAT=1        MTE=3
THREAT ADDRESS=N/A
TTI=2-ALT/RANGE/BEARING DATA

[ RUN ] [ ] [ PREV ] [ PREV ] [ RETURN ]
TEST   TEST   TEST   TEST

```

GICB:

BDS DATA screens display full content of the selected BDS format being received via GICB DF20 or DF21 in RTCA/ICAO engineering units.

```

TIS                    BAT 2.5 Hr

TARGETS:5              UUT HDG:180 deg
1 2 3 4 5
BRG(deg): 120 90 234 182 23
RNG(nm): 6.00 4.00 3.00 2.00 1.00
ALT(ft): 3500 2000 1000 500 0
ALT RATE:CLIMB LEVEL LEVEL CLIMB LEVEL
HDG(deg): 234 178 56 22 0
TRAFFIC : PROX PROX PROX PROX TRFC

ADDR=3AC421 (16542041) N12345
TSCR= 5 TSDR= 1 ALT =126700 ft
TIS STATUS=CONNECTING INFO=0000

[ RUN ] [ PREV ] [ NEXT ] [ ] [ ]
TEST   PARAM   PARAM

```

TIS

Up to 5 static intruders may be simulated relative to the A/C (UUT).

General

Radiated Testing:

The IFR 6000 is supplied with a lightweight fully sealed directional antenna that may be test set mounted, hand held or tripod mounted.

Direct Connect Testing:

The IFR 6000 may be directly connected to the UUT via a supplied RF coax cable via the RF I/O port.



Transit Case:

The IFR-6000 is supplied in a rugged plastic transit case which provides stowage for the test set, directional antenna, RF coax cable, antenna shield, breakout box, and power supply/charger.



SPECIFICATION

DME MODE SPECIFICATIONS

SIGNAL GENERATOR

A 5-minute warm-up period is required for all specifications.

OUTPUT FREQUENCY

REPLY FREQUENCY

Range

962 to 1213 MHz

Accuracy

± 10 kHz

OUTPUT LEVEL

ANTENNA PORT

Range

-67 to -2 dBm at Antenna port

Resolution

1 dB

Accuracy

± 2 dB

Distance to UUT antenna

6 to 300 ft with supplied antenna

RF I/O PORT

Range

-115 to -47 dBm

Resolution

1 dB

Accuracy

-95 dBm to -47 dBm ± 1 dB

Accuracy

-115 dBm to <-95 dBm ± 2 dB

REPLY PULSE SPACING

P1 to P2

$12 \mu\text{s} \pm 100 \text{ ns}$ (X Channel) @ 50% peak

P1 to P2

$30 \mu\text{s} \pm 100 \text{ ns}$ (Y Channel) @ 50% peak

REPLY PULSE WIDTH

P1/P2

$3.5 \mu\text{s} \pm 0.5 \mu\text{s}$

ECHO REPLY

Control

On/Off

Position

$30 \text{ nmi} \pm 1 \text{ nmi}$

Amplitude

-11 dB ± 1 dB relative to reply level

REPLY PULSE RISE AND FALL TIMES

ALL PULSES

Rise Time

$2.5 \mu\text{s} \pm 0.25 \mu\text{s}$ (10% to 90%)

Fall Time

$2.5 \mu\text{s} \pm 0.25 \mu\text{s}$ (90% to 10%)

REPLY DELAY

X CHANNEL

Fixed Reply Delay

$50 \mu\text{s} \pm 100 \text{ ns}$

Y CHANNEL

Fixed Reply Delay

$56 \mu\text{s} \pm 100 \text{ ns}$

RANGE DELAY

X AND Y CHANNEL

Range

0 to 450.00 nmi

Resolution

0.01 nmi

Accuracy

$\pm 0.01 \text{ nmi}$

RANGE RATE

X AND Y CHANNEL

Range

10 to 6500 kts

Resolution

1 kts

Accuracy

$\pm 0.01\%$ typical, tested to $\pm 0.5\%$

SQUITTER

PRF

2700 Hz

Accuracy

$\pm 2\%$

Distribution

Per ARINC 568

REPLY EFFICIENCY

Range

0 to 100%

Resolution

1% increments

Accuracy

$\pm 0.5\%$

IDENT TONE

Selection

Selectable three letter code

Frequency

1350 Hz

Accuracy

± 2 Hz

UUT MEASUREMENTS

ERP

Range

+47 to +64 dBm

Resolution

0.1 dB

Accuracy

± 2 dB

DIRECT CONNECTION PEAK PULSE POWER

Range

+47 to +64 dBm

Resolution

0.1 dB

Accuracy

± 1 dB

FREQUENCY

Range

1025.00 to 1150.00 MHz

Resolution

10 kHz

Accuracy

± 20 kHz

INTERROGATION PULSE WIDTH

P1 AND P2 PULSE WIDTHS

Range

2.00 to 5.00 μ s

Resolution

1 ns

Accuracy

± 50 ns

INTERROGATION PULSE SPACING

P1 to P2 Spacing

10 to 14 μ s (X Channel)

P1 to P2 Spacing

34 to 38 μ s (Y Channel)

Resolution

10 ns

Accuracy

± 20 ns

INTERROGATION PRF

Range

1 to 300 Hz

Resolution

1 Hz

Accuracy

± 2 Hz

TRANSPONDER MODE SPECIFICATIONS

SIGNAL GENERATOR

RF OUTPUT FREQUENCY

Interrogation Frequency

1030 MHz

Accuracy

± 10 kHz

RF OUTPUT LEVEL

ANTENNA PORT

MTL + 6 dB typical, automatically controlled for a MTL range of -83 to -68 dBm

Range

-67 to -2 dBm at antenna port

Resolution

0.5 dB

Accuracy

± 2 dB

Distance to UUT antenna

6 to 200 ft with supplied antenna

RF I/O PORT

MTL + 6 dB typical, automatically controlled

Range

-115 to -47 dBm

Resolution

0.5 dB

Accuracy

-95 to -47 dBm, ± 1 dB

Accuracy

-115 to <-95 dBm, ± 2 dB

ATCRBS/MODE S INTERROGATION PULSE SPACING

MODE A

P1 to P2

2.00 μ s ± 25 ns

P1 to P3

8.00 μ s ± 25 ns

MODE C

P1 to P2

2.00 μ s ± 25 ns

P1 to P3

21.00 μ s ± 25 ns

MODE S

P1 to P2

2.00 μ s ± 25 ns

P1 to P6

3.50 μ s ± 25 ns

P1 to SPR

4.75 μ s ± 25 ns

P5 to SPR

0.40 μ s ± 50 ns

INTERMODE INTERROGATION PULSE SPACING

MODE A

P1 to P3

8.00 μs $\pm$ 25 ns

P1 to P4

10.00 μs $\pm$ 25 ns

MODE C

P1 to P3

21.00 μs $\pm$ 25 ns

P1 to P4

23.00 μs $\pm$ 25 ns

INTERROGATION PULSE WIDTHS

MODE A,C,S,INTERMODE

P1,P2,P3

0.80 μs $\pm$ 50 ns

MODE S

P6 (Short DPSK Block)

16.25 μs $\pm$ 50 ns

P6 (Long DPSK Block)

30.25 μs $\pm$ 50 ns

P5

0.80 μs $\pm$ 50 ns

INTERMODE

P4 (Short)

0.80 μs $\pm$ 50 ns

P4 (Long)

1.60 μs $\pm$ 50 ns

INTERROGATION PULSE RISE AND FALL TIMES

ALL MODES

Rise Time

50 to 100 ns

Fall Time

50 to 200 ns

PHASE MODULATION

ALL MODES

Transition Time

$\leq$ 80 ns

Phase Shift

180° $\pm$ 10°

SLS LEVELS

ATCRBS

SLS Level (P2)

-9 dB, -1 to +0 dB relative to P1 level

0 dB, -0 to +1 dB relative to P1 level

Off

MODE S

SLS Level (P5)

-12 dB, -1 to +0 dB relative to P6 level

+3 dB, -0 to +1 dB relative to P6 level

Off

Note: SLS level is automatically controlled in the SLS LEVEL test.

INTERROGATION TEST SIGNALS

MODE S

PRF

50 Hz $\pm$ 5 Hz

ATCRBS

PRF

235 Hz $\pm$ 5 Hz

UUT MEASUREMENTS

ERP (@ 1090 MHZ)

Range

+ 45.5 to + 59 dBm (35.5 to 800 watts)

Resolution

0.1 dB

Accuracy

$\pm$ 2 dB

Direct Connection Peak Pulse Power (@1090 MHz)

Range

+ 46.5 to + 59 dBm (45 to 800 watts)

Resolution

0.1 dB

Accuracy

$\pm$ 1 dB

TRANSMITTER FREQUENCY

Range

1087.000 to 1093.000 MHz

Resolution

10 kHz

Accuracy

$\pm$ 50 kHz

RECEIVER SENSITIVITY, RADIATED MTL

Range

-67 to -79 dBm into 0 dBi antenna

Resolution

0.1 dB

Accuracy

$\pm$ 2 dB, typical

RECEIVER SENSITIVITY, DIRECT CONNECTION MTL

Range

-67 to -79 dBm

Resolution

0.1 dB

Accuracy

$\pm$ 2 dB

REPLY DELAY

ATCRBS

Range

1.80 to 7.00 μs

Resolution

10 ns

Accuracy

$\pm$ 50 ns

REPLY DELAY, MODE S AND ATRCBS MODE S ALL-CALL

Range

125.00 to 131.00 μ s

Resolution

10 ns

Accuracy

$\pm$ 50 ns

REPLY DELAY JITTER

ATRCBS

Range

0.00 to 2.30 μ s

Resolution

1 ns

Accuracy

$\pm$ 20 ns

MODE S AND ATRCBS MODE S ALL-CALL

Range

0.00 to 6.00 μ s

Resolution

1 ns

Accuracy

$\pm$ 20 ns

PULSE SPACING

F1 TO F2

Range

19.70 to 21.60 μ s

Resolution

1 ns

Accuracy

$\pm$ 20 ns

MODE S PREAMBLE

Range, P1 to P2

0.8 to 1.2 μ s

Range, P1 to P3

3.3 to 3.7 μ s

Range, P1 to P4

4.3 to 4.7 μ s

Resolution

1 ns

Accuracy

$\pm$ 20 ns

PULSE WIDTHS

F1 AND F2

Range

0.25 to 0.75 μ s

Resolution

1 ns

Accuracy

$\pm$ 20 ns

MODE S PREAMBLE

Range

0.25 to 0.75 μ s

Resolution

1 ns

Accuracy

$\pm$ 20 ns

PULSE AMPLITUDE VARIATION

Range, Mode S (Relative to P1)

+3 to -3 dB

Range, ATRCBS (Relative to F1)

+3 to -3 dB

Resolution

0.1 dB (0.01 dB via RCI)

Accuracy

$\pm$ 0.5 dB

DF 11 SQUIPPER PERIOD

Range

0.10 to 4.88 sec

Resolution

10 ms

Accuracy

$\pm$ 10 ms

DIVERSITY ISOLATION

Range

0 to >20 dB (Depending on Test Distance)

Test Distance

1.83m (6ft) to 28.96m (95ft)

Resolution

0.1 dB

Accuracy

$\pm$ 3 dB

TCAS MODE SPECIFICATIONS

SIGNAL GENERATOR

OUTPUT FREQUENCY

REPLY FREQUENCY

1090 MHz

Accuracy

$\pm$ 10 kHz

OUTPUT LEVEL (SIMULATED ERP)

ANTENNA PORT Note 1

Radiated power at 0dBi UUT antenna

-68 dBm typical @ 10 Nmi Range, automatically controlled

Range

-67 to -2 dBm at Antenna port

Resolution

0.5 dB

Accuracy

$\pm$ 2 dB

Distance to UUT antenna

6 to 300 ft with supplied antenna

RF I/O PORT

Automatic mode

-68 dBm @ 10 Nmi Range, automatically controlled

Manual mode Range

-115 to -47 dBm

Resolution

0.5 dB

Accuracy

-95 to -47 dBm, $\pm$ 1 dB

Accuracy

-115 to <-95 dBm, $\pm$ 2 dB

REPLY PULSE SPACING

MODE C

F1 to F2

20.30 μs $\pm$ 25 ns

F1 to C1

1.45 μs $\pm$ 25 ns

F1 to A1

2.90 μs $\pm$ 25 ns

F1 to C2

4.35 μs $\pm$ 25 ns

F1 to A2

5.80 μs $\pm$ 25 ns

F1 to C4

7.25 μs $\pm$ 25 ns

F1 to A4

8.70 μs $\pm$ 25 ns

F1 to B1

11.60 μs $\pm$ 25 ns

F1 to D1

13.05 μs $\pm$ 25 ns

F1 to B2

14.50 μs $\pm$ 25 ns

F1 to D2

15.95 μs $\pm$ 25 ns

F1 to B4

17.40 μs $\pm$ 25 ns

F1 to D4

18.85 μs $\pm$ 25 ns

MODE S

P1 to P2

1.00 μs $\pm$ 25 ns

P1 to P3

3.50 μs $\pm$ 25 ns

P1 to P4

4.50 μs $\pm$ 25 ns

P1 to D1

8.00 μs $\pm$ 25 ns

D1 to Dn (n=2 to 112)

1.00 μs times (n-1) $\pm$ 25 ns

REPLY PULSE WIDTHS

MODE C

All Pulses

0.45 μs $\pm$ 50 ns

MODE S

P1 through P4

0.50 μs $\pm$ 50 ns

D1 through D112

0.50 μs $\pm$ 50 ns, 1 μs chip width

Reply Modes

TCAS I / II Mode C (with altitude reporting)

TCAS II Mode S formats 0, 11, 16

REPLY PULSE AMPLITUDES

ATCRBS

$\pm$ 1 dB relative to F1

Mode S

$\pm$ 1 dB relative to P1

REPLY PULSE RISE AND FALL TIMES

ALL MODES

Rise Time

50 to 100 ns

Fall Time

50 to 200 ns

PERCENT REPLY

Range

0 to 100%

Resolution

10%

Accuracy

$\pm$ 1%

REPLY DELAY

ATCRBS

3.0 μs $\pm$ 50 ns

Mode S

128 μs $\pm$ 50 ns

RANGE DELAY

Range

0 to 260 nmi

Resolution

0.1 nmi

Accuracy

$\pm$ 0.02 nmi

RANGE RATE

Range

-1200 to +1200 kts

Resolution

10 kts

Accuracy

10%

ALTITUDE RANGE

Range

-1000 to 126,000 ft

Resolution, Mode C

100 ft

Resolution, Mode S

25 ft

ALTITUDE RATE

Range

-10,000 to +10,000 fpm

Resolution

100 fpm

Accuracy

10%

SQUITTER

Control

On/Off

Rate

0.8 to 1.2 seconds, randomly distributed

RECEIVER

PULSE SPACING

ATCRBS (Mode C All Call)

S1 to P1	2.0 us
Accepts	$\leq \pm 200$ ns
Rejects	$\geq \pm 1.0$ us
P1 to P3	21.0 us
Accepts	$\leq \pm 200$ ns
Rejects (<10% Replies)	$\geq \pm 1.0$ us
P1 to P4	23.0 us
Accepts	$\leq \pm 200$ ns
Rejects (<10% Replies)	$\geq \pm 1.0$ us

Mode S

P1 to P2	2.0 us
Accepts	$\leq \pm 200$ ns
Rejects (<10% Replies)	$\geq \pm 1.0$ us
P1 to SPR	4.75 us
Accepts	$\leq \pm 200$ ns
Rejects (<10% Replies)	$\geq \pm 1.5$ us

SUPPRESION

ATCRBS (P2 or S1)

>0.5dB above level of P1 <10% Replies

UUT MEASUREMENTS

ERP (@1030MHZ)

ATCRBS

Range

+43 to +58 dBm (20 to 631 watts)

Resolution

0.1 dB

Accuracy

± 2 dB

MODE S

Range

+43 to +58 dBm (20 to 631 watts)

Resolution

0.1 dB

Accuracy

± 2 dB

DIRECT CONNECTION PEAK PULSE POWER (@1030MHZ)

ATCRBS

Range

+43 to +58 dBm (20 to 631 watts)

Resolution

0.1 dB

Accuracy

± 1 dB

MODE S

Range

+43 to +58 dBm (20 to 631 watts)

Resolution

0.1 dB

Accuracy

± 1 dB

FREQUENCY

Range

1029.900 to 1030.100 MHz

Resolution

1 kHz

Accuracy

± 10 kHz

TCAS BROADCAST INTERVAL

Range

1.0 to 12.0 sec

Resolution

0.1 sec

Accuracy

± 0.2 sec

MISCELLANEOUS INPUT/OUTPUTS

RF I/O

Type

Input/Output

Impedance

50 Ω typical

Maximum Input Level

4 kW peak

10 W average

VSWR

< 1.3:1

ANTENNA

Type

Input/Output

Impedance

50 Ω typical

Maximum Input Level

10 W peak

1/2 W average

VIDEO

Type

Output

Impedance

50 Ω typical

Generate Video Level

1.1 $\pm$ 0.4V peak to peak into 50 Ω

Receive Video Level

Proportional to IF level

Baseline

± 0.5 V referenced to ground

TEST ANTENNA

VSWR

< 1.5:1

Gain

6 dB, Typical

TIME BASE (TCXO)

Temperature Stability

± 1 ppm

Aging

± 1 ppm per year

Accuracy

± 1 ppm

Test Limit

± 0.3 ppm

BATTERY

Type

Li Ion

Duration

> 4 hrs continuous operation

> 6 hrs, Typical

INPUT POWER (TEST SET)

Input Range

11 VDC to 32 VDC

Power Consumption

55 W Maximum

16 W Nominal at 18 VDC with charged battery

Fuse Requirements

5 A, 32 VDC, Type F

INPUT POWER (SUPPLIED EXTERNAL AC TO DC CONVERTER)

Input Range

100 to 250 VAC, 1.5 A Max, 47-63 Hz

Mains Supply Voltage Fluctuations

≤ 10% of the nominal voltage

Transient Overvoltages

According to Installation Category II

ENVIRONMENTAL (TEST SET)

Use

Pollution Degree 2

Altitude

≤ 4800 meters

Operating Temperature

^{NOTE 3} -20°C to 55°C

Storage Temperature

^{NOTE 4} -30°C to 71°C

Relative Humidity

95% ±5% from 5° to 30°C

75% ±5% from 30° to 40°C

45% ±5% from 40° to 55°C

ENVIRONMENTAL (SUPPLIED EXTERNAL AC TO DC CONVERTER)

Use

Indoors

Altitude

≤ 10,000 meters

Operating Temperature

0° to 40°C

Storage Temperature

-20°C to 71°C

PHYSICAL CHARACTERISTICS

DIMENSIONS

Height

11.2 inches (28.5 cm)

Width

9.1 inches (23.1 cm)

Depth

2.7 inches (6.9 cm)

Weight (Test set only)

< 8 lbs. (3.6 kg)

SUPPLEMENTAL INFORMATION

Test Set Certifications

Altitude, operating	MIL-PRF-28800F	Class 2
Altitude, not operating	MIL-PRF-28800F	Class 2
Bench Handling	MIL-PRF-28800F	Class 2
Blowing Dust	MIL-STD-810F	Method 510.4, Procedure I
Drip-proof	MIL-PRF-28800F	Class 2
Explosive Atmosphere	MIL-STD-810F	Method 511.4, Procedure 1
Relative Humidity	MIL-PRF-28800F	Class 2
Shock, Functional	MIL-PRF-28800F	Class 2
Vibration Limits	MIL-PRF-28800F	Class 2
Temp, operating ^{NOTE 5}	MIL-PRF-28800F	Class 2
Temp, not operating ^{NOTE 6}	MIL-PRF-28800F	Class 2
Transit Drop	MIL-PRF-28800F	Class 2
Safety Compliance	UL-61010B-1	
	EN 61010-1	
	CSA 22.2 No 61010-1	
EMC	EN 61326	

EXTERNAL AC-DC CONVERTER CERTIFICATIONS

Safety Compliance	UL 1950 DS
	CSA 22.2 No. 234
	VDE EN 60 950
EMI/RFI Compliance	FCC Docket 20780 Curve "B"
EMC	EN 61326

TRANSIT CASE CERTIFICATIONS

Drop Test	FED-STD-101C	Method 5007.1 Paragraph 6.3, Procedure A, Level A
Falling Dart Impact	ATA 300	Category I
Vibration, Loose Cargo	FED-STD-101C	Method 5019
Vibration, Sweep	ATA 300	Category I
Simulated Rainfall	MIL-STD-810F	Method 506.4 Procedure II of 4.1.2
	FED-STD-101C	Method 5009.1 Sec 6.7.1
Immersion	MIL-STD-810F	Method 512.4

Notes

- NOTE 1 Simulates a 50.5 dBm XPDR ERP at 10 nMi range.
- NOTE 2 Level automatically controlled based on actual distance to UUT antenna.
- NOTE 3 Battery charging temperature range: 5°C to 40°C (controlled by internal charger).
- NOTE 4 Li Ion Battery must be removed below -20°C and above 60°C.
- NOTE 5 Temperature range extended to -20°C to 55°C.
- NOTE 6 Temperature range reduced to -30°C to 71°C.

VERSIONS AND ACCESSORIES

When ordering please quote the full ordering number information.

Ordering Numbers

6000-110

6000-220

6000OPT2

6000OPT3

Versions

IFR 6000 Mode A/C/S Transponder and DME Ramp Test Set, with US Mains Leads

IFR 6000 Mode A/C/S Transponder and DME Ramp Test Set, with European Mains Leads

TCAS (TIS)

ADS-B

Extended Standard Warranties with Calibration for 6000

W6000/203C Extended standard warranty 36 months with scheduled calibration

W6000/205C Extended standard warranty 60 months with scheduled calibration

Accessories for 6000

AC0820 Desk Top Stand

AC0826 Tripod

AC0825CD IFR 6000 Operation Manual - CD

AC24006 Tripod, Dolly, Stand

CHINA Beijing

Tel: [+86] (10) 6539 1166
Fax: [+86] (10) 6539 1778

CHINA Shanghai

Tel: [+86] (21) 5109 5128
Fax: [+86] (21) 5150 6112

FINLAND

Tel: [+358] (9) 2709 5541
Fax: [+358] (9) 804 2441

FRANCE

Tel: [+33] 1 60 79 96 00
Fax: [+33] 1 60 77 69 22

GERMANY

Tel: [+49] 8131 2926-0
Fax: [+49] 8131 2926-130

HONG KONG

Tel: [+852] 2832 7988
Fax: [+852] 2834 5364

INDIA

Tel: [+91] 80 5115 4501
Fax: [+91] 80 5115 4502

KOREA

Tel: [+82] (2) 3424 2719
Fax: [+82] (2) 3424 8620

SCANDINAVIA

Tel: [+45] 9614 0045
Fax: [+45] 9614 0047

SPAIN

Tel: [+34] (91) 640 11 34
Fax: [+34] (91) 640 06 40

UK Burnham

Tel: [+44] (0) 1628 604455
Fax: [+44] (0) 1628 662017

UK Cambridge

Tel: [+44] (0) 1763 262277
Fax: [+44] (0) 1763 285353

UK Stevenage

Tel: [+44] (0) 1438 742200
Fax: [+44] (0) 1438 727601
Freephone: 0800 282388

USA

Tel: [+1] (316) 522 4981
Fax: [+1] (316) 522 1360
Toll Free: 800 835 2352



As we are always seeking to improve our products, the information in this document gives only a general indication of the product capacity, performance and suitability, none of which shall form part of any contract. We reserve the right to make design changes without notice. All trademarks are acknowledged. Parent company Aeroflex, Inc. ©Aeroflex 2006.

www.aeroflex.com
info-test@eroflex.com



Our passion for performance is defined by three attributes represented by these three icons: solution-minded, performance-driven and customer-focused.